

Features

- Input Voltage up to 12V
- MOSFET Turn on Resistor RSS(ON)
=4.3mohm(typ)@Vgs=4.5V
- Drain to Drain MOSFET Module
- With ESD Protection
- Continuous Current=8A
- Green Product (RoHS, Lead-Free, Halogen-Free Compliant)

General Description

The GS95C4CS-R drain to drain connected MOSFET module provides an integrated solution with small dimension for battery pack of Mobile phone and electronic bracelet application.

Applications

- Mobile phone
- Electronic Bracelet

Typical Application

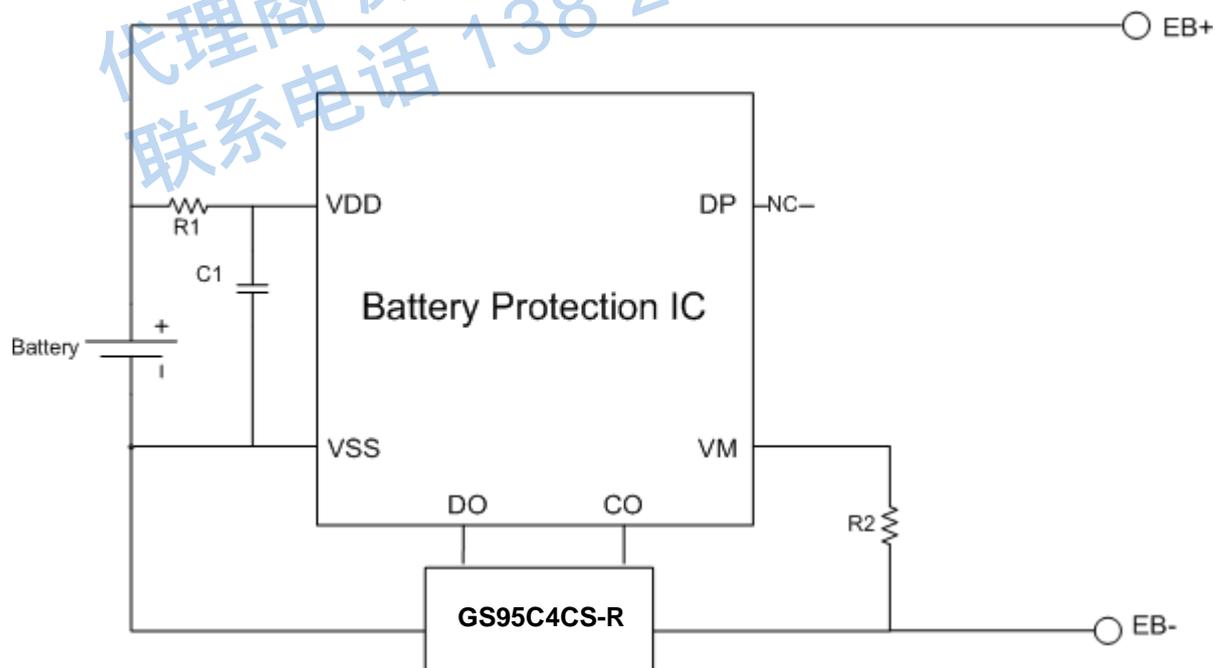


Figure 1 Application of GS95C4CS-R used in battery pack

Function Block Diagram

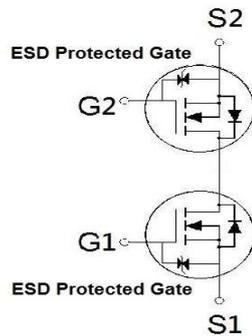


Figure 2 Function Block Diagram

Pin Configuration

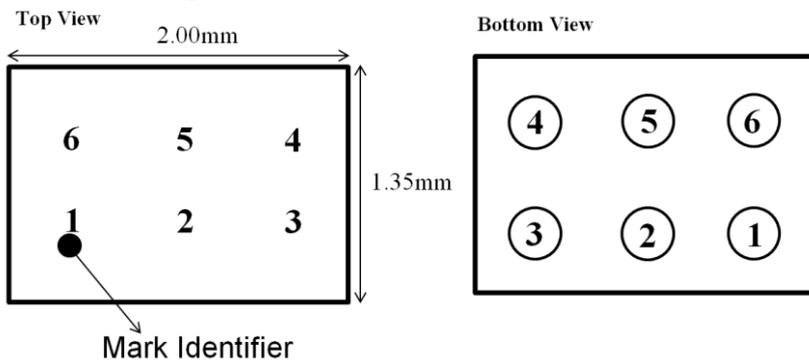


Figure 3 WLCSP 2.00x1.35

Pin Descriptions

No.	Name	I/O type	Description
1	S1	I/O	Source1
2	G1	I	Gate1
3	S1	I/O	Source1
4	S2	I/O	Source2
5	G2	I	Gate2
6	S2	I/O	Source2

Absolute Maximum Ratings ($T_A=25^{\circ}\text{C}$ Unless Otherwise Noted)

PARAMETER / TEST CONDITIONS	SYMBOL	LIMITS	UNITS
Source-Source Voltage	V_{SSS}	12	V
Gate-Source Voltage	V_{GSS}	± 10	V
Continuous Source Current	I_S	8	A
Pulsed Source Current ¹	I_{SP}	80	A
Total Dissipation ²	P_T	1.5	W
Thermal Resistance ²	$R_{\theta JA}$	70	$^{\circ}\text{C} / \text{W}$
Operating Junction & Storage Temperature Range	T_J & T_{stg}	-55~150	$^{\circ}\text{C}$

¹ $PW \leq 10\mu\text{s}$, duty cycle $\leq 1\%$.

²When mounted on 1in^2 FR-4 board.

Electrical Characteristics ($T_J=25^{\circ}\text{C}$ Unless Otherwise Noted)

PARAMETER	SYMBOL	TEST CONDITIONS	LIMITS			UNITS
			MIN	TYP	MAX	
STATIC						
Source-Source Breakdown Voltage	$V_{(BR)SSS}$	$V_{GS} = 0\text{V}$, $I_S = 1\text{mA}$	12			V
Gate Threshold Voltage	$V_{GS(th)}$	$V_{SS} = 10\text{V}$, $I_S = 1\text{mA}$	0.35	0.90	1.4	
Gate-Source Leakage	I_{GSS}	$V_{SS} = 0\text{V}$, $V_{GS} = \pm 8\text{V}$			± 10	μA
		$V_{SS} = 0\text{V}$, $V_{GS} = \pm 5\text{V}$			± 1	
Zero Gate Voltage Source Current	I_{SSS}	$V_{SS} = 12\text{V}$, $V_{GS} = 0\text{V}$			1	μA
Drain-Source On-State Resistance ¹	$R_{SS(ON)}$	$V_{GS} = 4.5\text{V}$, $I_S = 3\text{A}$	3.0	4.3	6.1	m Ω
		$V_{GS} = 3.8\text{V}$, $I_S = 3\text{A}$	3.2	4.8	6.5	
		$V_{GS} = 3.1\text{V}$, $I_S = 3\text{A}$	3.5	5.6	7.8	
		$V_{GS} = 2.5\text{V}$, $I_S = 3\text{A}$	3.8	7.5	10	


DYNAMIC						
Input Capacitance	C_{ISS}			TBD		pF
Output Capacitance	C_{OSS}	$V_{GS} = 0V, V_{DS} = 12V, f = 1MHz$		TBD		
Reverse Transfer Capacitance	C_{RSS}			TBD		
Gate Resistance	R_g	$F = 1MHz$		TBD		Ω
Total Gate Charge ²	Q_g	$V_{SS} = 12V, V_{GS} = 4.5V, I_S = 5A$		TBD		nC
Turn-On Delay Time ²	$t_{d(on)}$	$V_{SS} = 12V, I_S \cong 5A, V_{GS} = 4.5V$		TBD		nS
Rise Time ²	t_r			TBD		
Turn-Off Delay Time ²	$t_{d(off)}$			TBD		
Fall Time ²	T_{f0}			TBD		
SOURCE-DRAIN DIODE RATINGS AND CHARACTERISTICS ($T_J = 25\text{ }^\circ\text{C}$)						
Forward Source-Source Voltage ¹	V_F	$I_S = 5A, V_{GS} = 0V$		0.6	1.2	V

¹Pulse test : Pulse Width $\leq 300\ \mu\text{sec}$, Duty Cycle $\leq 2\%$.


²Independent of operating temperature.

Package Dimensions, WLCSP 2.000x1.350


(Bottom View)

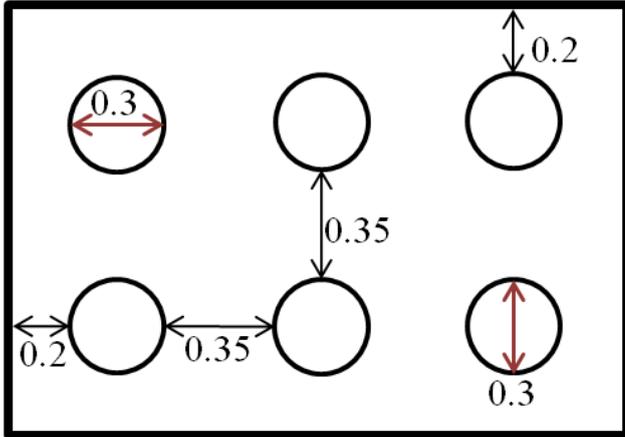

(Front View)




(Top View)

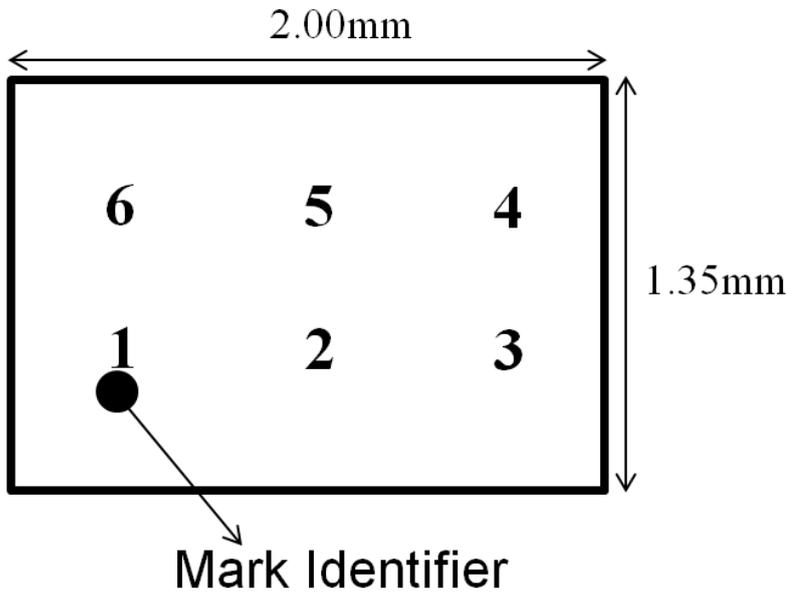


Note: All Dimension in millimeter

A. Marking Information(Product Code : A34)

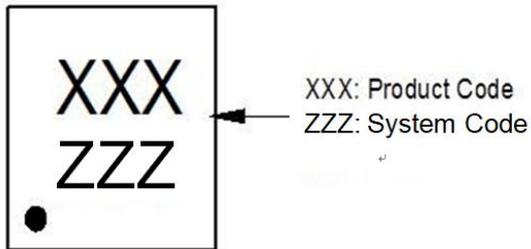


B. Tape & Reel Information : 5000pcs/Reel

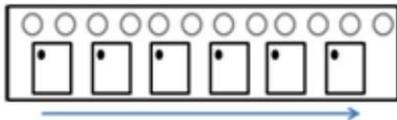


C. Lot No. & Date Code Rule

1. Lot No.

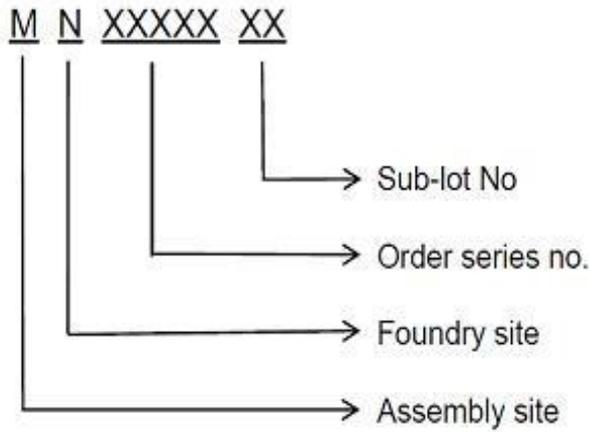

2. Date Code

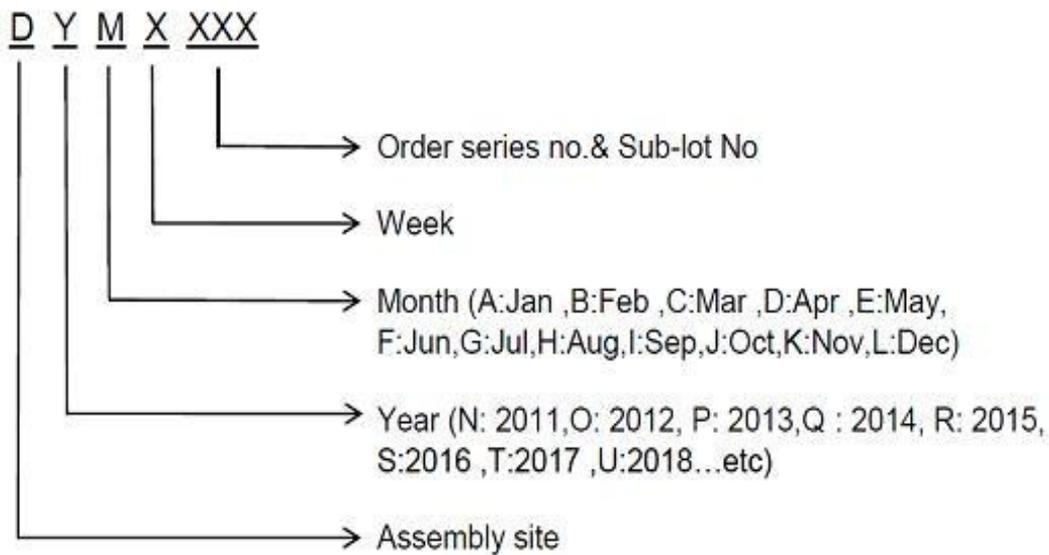

D. Label rule

Label content



1	Label Size	30 * 90 mm
2	Font style	Times New Roman or Arial (或可区分英文“0”和数字“0”，“G”和“Q”的字型即可)
3	U-NIKC	Height: 4 mm
4	Package	Height: 2 mm
5	Device	Height: 3 mm (Max: 16 Digit)
6	Lot	Height: 3 mm (Max: 9 Digit) Sub lot
7	D/C	Height: 3 mm (Max: 7 Digit)
8	QTY	Height: 3 mm (Max: 6 Digit) Thousand mark is no needed
9	RoHS label	 long axis: 12 mm minor axis: 6 mm bottom color: White Font color: Black Font style: Arial
10	Halogen Free label	 Diameter: 10 mm bottom color: Green Font color: Black Font style: Arial
11	Scan information	Device / Lot / D/C / QTY , Insert “ / “ between every parts. for example: P3055LDG/G12345601/GGG2301/2000 DPI (Dots per inch): Over 300 dpi Code : Code 128 Height: 6 mm at least

DISCLAIMERS

Please read the notice stated in this preamble carefully before Admission accessing any contents of the document attached. Admission of U-NIKC's statement therein is presumed once the document is released to the receiver.

Notice:

Firstly, WUXI U-NIKC SEMICONDUCTOR COMPANY reserves the right to make corrections, modifications, enhancements, improvements, and other changes to its information herein without notice.. And the aforesaid information does not form any part or parts of any quotation or contract between U-NIKC and the information receiver.

Further, no responsibility is assumed for the usage of the aforesaid information. U-NIKC makes no representation that the interconnect of its circuits as described herein will not infringe on existing or future patent rights and other intellectual property rights, nor do the descriptions contained herein express or imply that any licenses under any U-NIKC patent right, copyright, mask work right, or other U-NIKC intellectual property right relating to any combination, machine, or process in which U-NIKC products or services are used.

Besides, the product in this document is not designed for use in life support appliances, devices, or systems where malfunction of this product can reasonably be expected to result in personal injury. U-NIKC customers' using or selling this product for use in such applications shall do so at their own risk and agree to fully indemnify U-NIKC for any damage resulting from such improper use or sale.

At last, the information furnished in this document is the property of U-NIKC and shall be treated as highly confidentiality; any kind of distribution, disclosure, copying, transformation or use of whole or parts of this document without duly authorization from U-NIKC by prior written consent is strictly prohibited. The receiver shall fully compensate U-NIKC without any reservation for any losses thereof due to its violation of U-NIKC's confidential request. The receiver is deemed to agree on U-NIKC's confidential request therein suppose that said receiver receives this document without making any expressly opposition. In the condition that aforesaid opposition is made, the receiver shall return this document to U-NIKC immediately without any delay